


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND EXCEPT WITH WRITTEN PERMISSION BY AGM CONTAINER CONTROLS, INC. SUCH INFORMATION SHALL NOT BE PUBLISHED, DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE AND THE DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.

REVISIONS					
ZONE	LTR.	DESCRIPTION	DATE	APPROVED	
---	M	ADVANCED REVISION TO AGREE WITH MIL.	PML 12-27-02	ROC	
B1	N	COLOR OF INK, ITEM 9, WAS WHITE IN ERROR.	JMO 2-17-03	PML	
A3	P	PART LIST TABLE: FASTENER & END FITTING WERE CARBON STEEL, PAD WAS IAW MIL SPEC	JMO 7-10-09	EJZ	

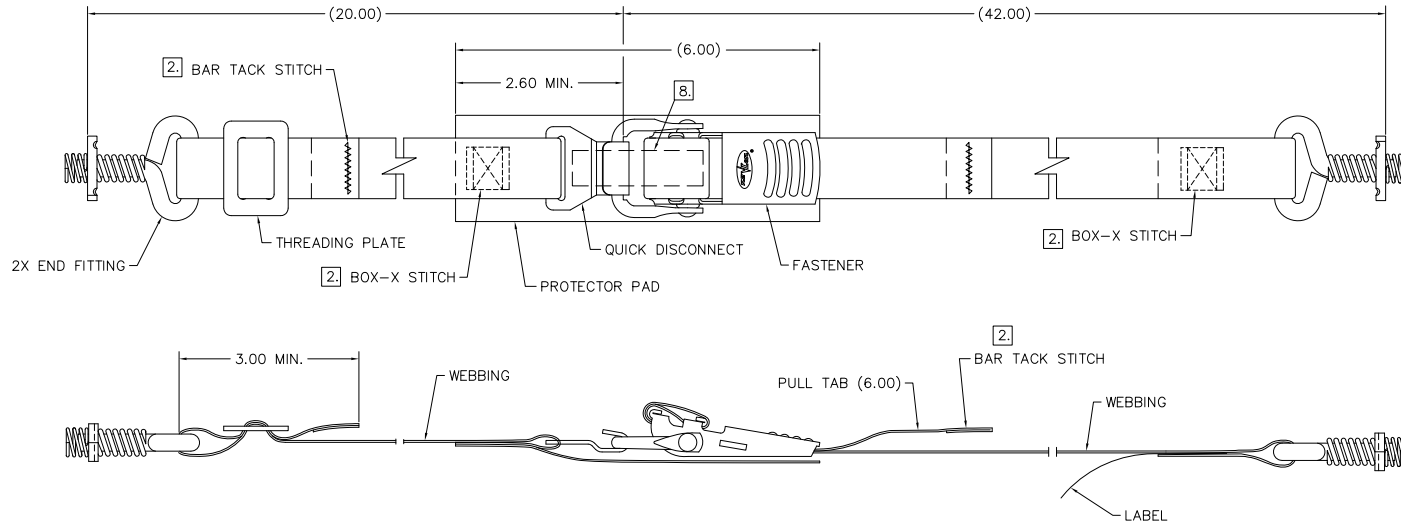

NOTES:

- DESCRIPTION: STRAP ASSEMBLY, EQUIPMENT TIE-DOWN, ADJUSTABLE FROM 11 TO 60 INCHES.
- STITCH IAW FED-STD-751, TYPE 301. PATTERN SHALL BE SUFFICIENT TO MEET REQUIREMENTS OF NOTE 3.
- MINIMUM TENSILE STRENGTH OF COMPLETE ASSEMBLY SHALL BE 300 POUNDS.
- WEBBING ENDS SHALL BE SEARED BEFORE STITCHING.
- FASTENER SHALL BE AN OVER CENTER LOCKING DEVICE THAT APPLIES TENSION TO WEBBING WHEN MANUALLY CLOSED.
- FINISH: STEEL COMPONENTS ZINC PLATED IAW ASTM B 633, TYPE II, SC3 (BRONZE CHROMATE FINISH).
- IDENTIFICATION SHALL BE IAW MIL-STD-130 WITH THE FOLLOWING INFORMATION:  
08992-CT1109  
K1012766-7
- MARKING SHALL BE BY STENCIL, SILK SCREEN, OR RUBBER STAMP WITH PERMANENT INK, ITEM 9, ON TOP SURFACE OF PROTECTOR PAD, ITEM 8.

SPECIFICATION CONTROL DRAWING

1	08992	815399	LABEL	INSTRUCTION/CAUTION LABEL	10
A/R	08992	911002	INK, EPOXY	IAW MIL-I-43553, COLOR BLACK	9
A/R	08992	K439	PROTECTOR PAD	NYLON, COLOR GREY	8
A/R	08992	970033	THREAD	POLYESTER IAW V-T-285, TYPE II, CLASS 1, SIZE FF, SUBCLASS A, COLOR BLACK	7
1	08992	W400-GR (52.00)	WEBBING	NYLON IAW MIL-W-4088, CLASS 2, TYPE XVII, COLOR GREY, COND. R, IAW MIL-W-27265	6
1	08992	W400-GR (25.00)	WEBBING	NYLON IAW MIL-W-4088, CLASS 2, TYPE XVII, COLOR GREY, COND. R, IAW MIL-W-27265	5
2	08992	K490	END FITTING	CARBON STEEL [6]	4
1	08992	K442	THREADING PLATE	COLD ROLLED STEEL [6]	3
1	08992	K462	QUICK DISCONNECT	COLD ROLLED STEEL [6]	2
1	08992	K417	FASTENER	CARBON STEEL [6]	1

PARTS LIST

PART DASH NO.		QTY. REQ'D PER ASSY.	FINAL	NEXT ASSY.	USED ON	SCALE TO	QTY. W/ SALL. WT.	<small>INTERPRET DIMENSIONS AND TOLERANCES IAW ASME Y14.5M-1982 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .XX ±.015 .XXX ±.010</small> <small>ANGLES 8.5°</small> <small>DO NOT SCALE DRAWING</small> <small>FINISH [6]</small>		<small>CHECKED</small> <small>DATE</small> <small>DATE</small> <small>DATE</small> <small>DATE</small>	<b>OGM CONTAINER CONTROLS, INC.</b> <small>P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020</small> <b>STRAP ASSEMBLY</b> <small>SIZE</small> <b>D</b> <small>FSCM NO.</small> <b>08992</b> <small>DWG. NO.</small> <b>CT1109</b> <small>REV</small> <b>P</b>
CUSTOMER								SCALE 1/1	RELEASE DATE	SHEET 1 OF 1	