

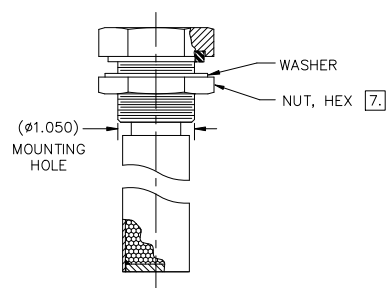


AIR FLOW "P" $\longrightarrow$ (OUT OF CONTAINER)
 AIR FLOW "V" $\longrightarrow$ (INTO CONTAINER)

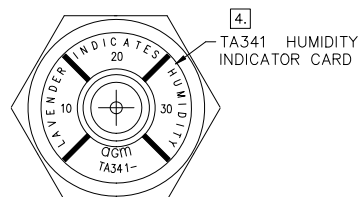

FOR VALVE AND CARTRIDGE DIMENSIONS, SEE FITTING
OPTION -0 FIGURE.

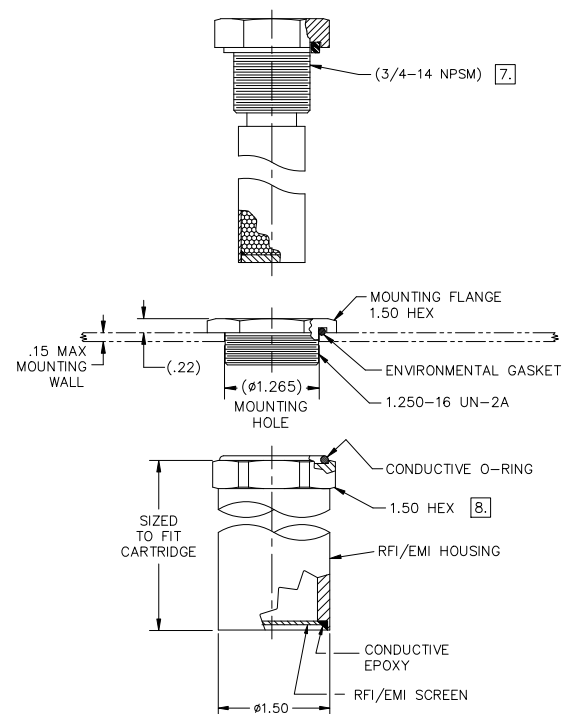

FOR VALVE AND CARTRIDGE DIMENSIONS, SEE FITTING
OPTION -0 FIGURE.

8 7 6 5 4 3 2 1

REVISIONS				
ZONE	LTR.	DESCRIPTION	DATE	APPROVED

RESEAL VALVE PERFORMANCE						
	PRESSURE SIDE (FLOW OUT)			VACUUM SIDE (FLOW IN)		
SETTING NUMBER	CRACKING PRESSURE RANGE (PSID)	RESEAL PRESSURE AFTER CRACK, MIN (PSID)	MINIMUM FLOW RATE (SCFM BY PSID)	CRACKING PRESSURE RANGE (PSID)	RESEAL PRESSURE AFTER CRACK, MIN (PSID)	MINIMUM FLOW RATE (SCFM BY PSID)
TA34X-03-03-DL-F	0.30-0.80	0.30	0.5 BY 2.00	0.30-0.80	0.30	0.5 BY 2.00
TA34X-05-05-DL-F	0.50-1.00	0.50	0.5 BY 2.00	0.50-1.00	0.50	0.5 BY 2.00
TA34X-05-20-DL-F	0.50-1.00	0.50	0.5 BY 2.00	2.00-3.00	2.00	0.6 BY 3.50
TA34X-10-10-DL-F	1.00-1.50	1.00	0.4 BY 2.50	1.00-1.50	1.00	0.5 BY 2.50
TA34X-15-05-DL-F	1.50-2.25	1.50	0.4 BY 3.00	0.50-1.00	0.50	0.5 BY 2.00
TA34X-15-15-DL-F	1.50-2.25	1.50	0.4 BY 3.00	1.50-2.25	1.50	0.6 BY 3.00
TA34X-20-20-DL-F	2.00-3.00	2.00	0.2 BY 3.50	2.00-3.00	2.00	0.6 BY 3.50
TA34X-25-15-DL-F	2.50-3.50	2.50	0.2 BY 4.00	1.50-2.25	1.50	0.6 BY 3.00
TA34X-25-25-DL-F	2.50-3.50	2.50	0.2 BY 4.00	2.50-3.50	2.50	0.5 BY 4.00
TA34X-30-05-DL-F	3.00-4.50	3.00	0.1 BY 4.50	0.50-1.00	0.50	0.5 BY 2.00
TA34X-30-20-DL-F	3.00-4.50	3.00	0.1 BY 4.50	2.00-3.00	2.00	0.6 BY 3.50
TA34X-30-30-DL-F	3.00-4.50	3.00	0.1 BY 4.50	3.00-4.50	3.00	0.5 BY 4.50
TA34X-30-60-DL-F	3.00-4.50	3.00	0.1 BY 5.00	6.00-7.50	6.00	0.1 BY 8.00
TA34X-50-50-DL-F	5.00-6.50	5.00	0.1 BY 7.50	5.00-6.50	5.00	0.2 BY 7.50

CRACKING VALVE PERFORMANCE						
	PRESSURE SIDE (FLOW OUT)			VACUUM SIDE (FLOW IN)		
SETTING NUMBER	CRACKING PRESSURE RANGE (PSID)	RESEAL PRESSURE AFTER CRACK, MIN (PSID)	MINIMUM FLOW RATE (SCFM BY PSID)	CRACKING PRESSURE RANGE (PSID)	RESEAL PRESSURE AFTER CRACK, MIN (PSID)	MINIMUM FLOW RATE (SCFM BY PSID)
TA34X-025C-025C-DL-F	0.10-0.40	0.10	0.5 BY 1.75	0.10-0.40	0.10	0.5 BY 1.75
TA34X-05C-05C-DL-F	0.30-0.70	0.10	0.5 BY 1.75	0.30-0.70	0.10	0.5 BY 1.75
TA34X-10C-10C-DL-F	0.75-1.25	0.50	0.5 BY 2.00	0.75-1.25	0.50	0.5 BY 2.00
TA34X-15C-15C-DL-F	1.25-1.75	1.00	0.4 BY 3.00	1.25-1.75	1.00	0.4 BY 3.00
TA34X-20C-20C-DL-F	1.75-2.25	1.50	0.4 BY 3.50	1.75-2.25	1.50	0.6 BY 3.50

SIZE	FSCM NO.	DWG. NO.	REV
D	08992	TA34X-PVDLF	—
SCALE	1	RELEASE DATE	SHEET 3