


8 7 6 5 4 3 2 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND EXCEPT WITH WRITTEN PERMISSION BY AGM CONTAINER CONTROLS, INC. SUCH INFORMATION SHALL NOT BE PUBLISHED, DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE AND THE DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.

REVISIONS				
ZONE	LTR.	DESCRIPTION	DATE	APPROVED

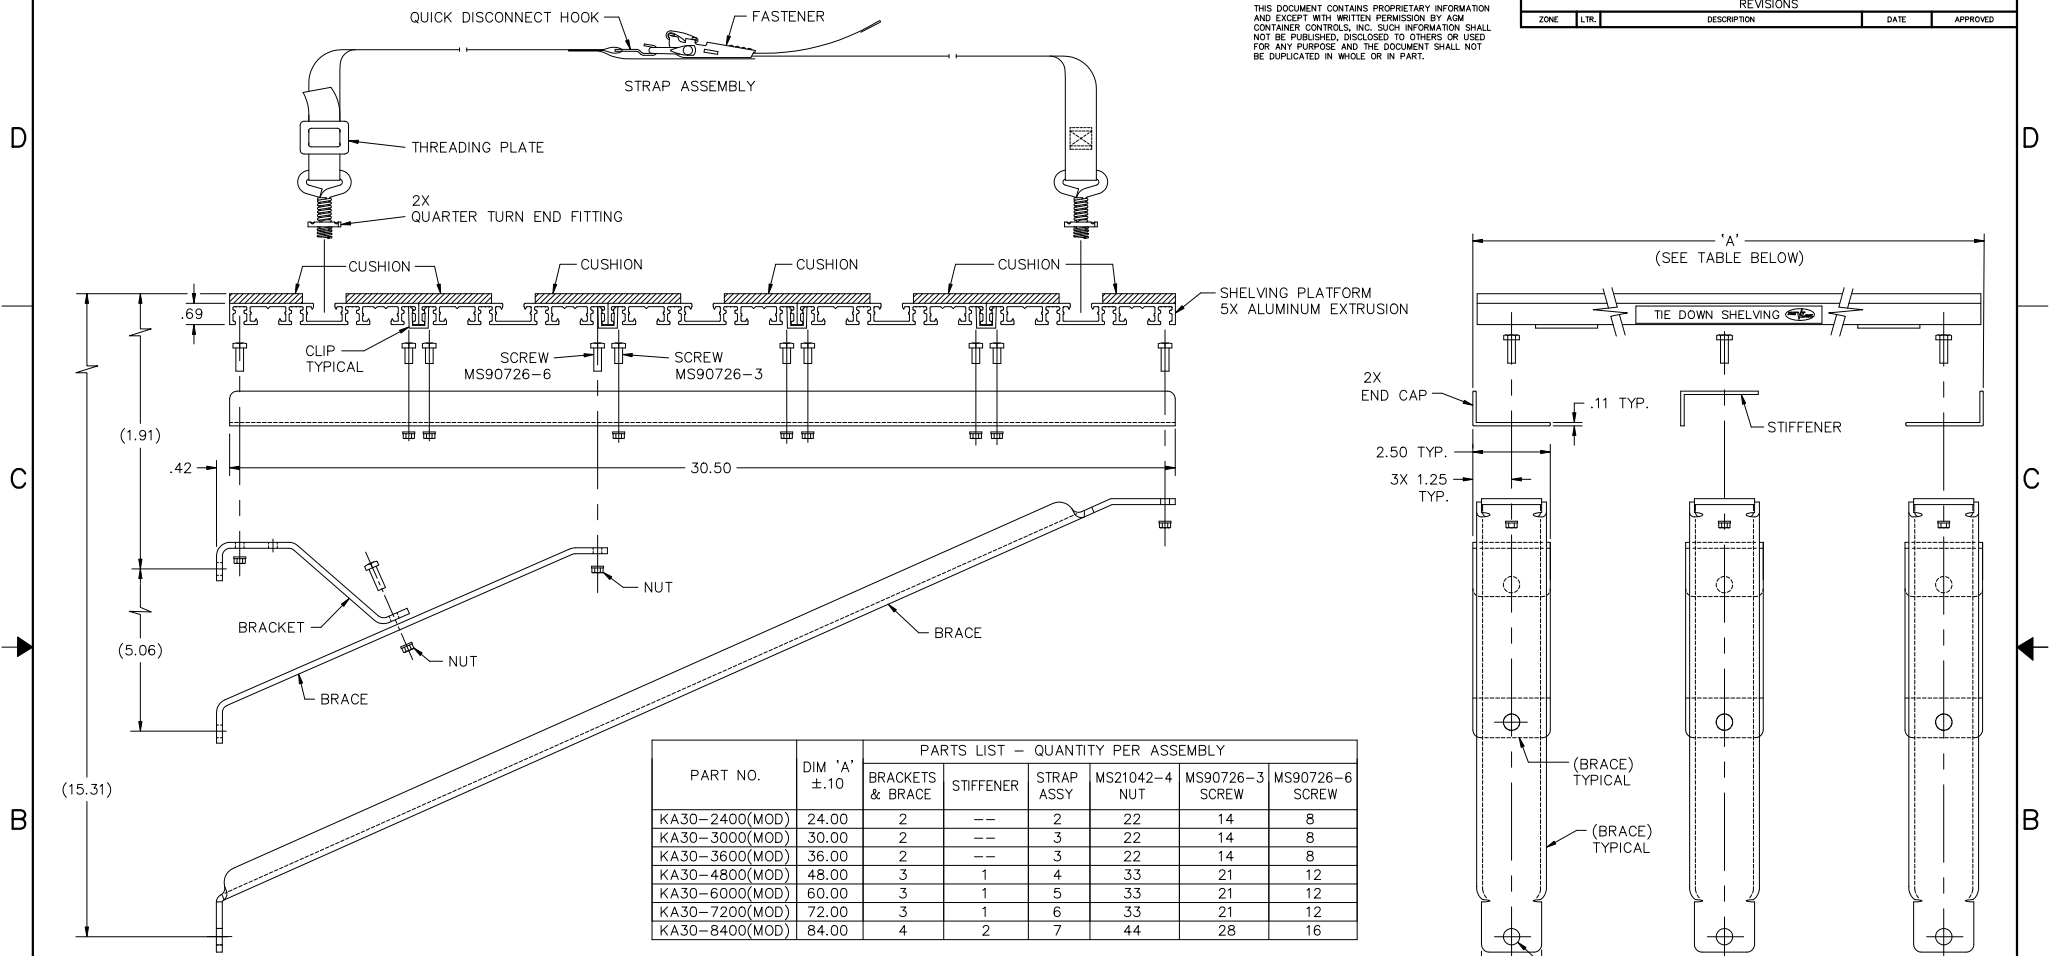

PART NO.	DIM 'A' ±.10	PARTS LIST - QUANTITY PER ASSEMBLY					
		BRACKETS & BRACE	STIFFENER	STRAP ASSY	MS21042-4 NUT	MS90726-3 SCREW	MS90726-6 SCREW
KA30-2400(MOD)	24.00	2	--	2	22	14	8
KA30-3000(MOD)	30.00	2	--	3	22	14	8
KA30-3600(MOD)	36.00	2	--	3	22	14	8
KA30-4800(MOD)	48.00	3	1	4	33	21	12
KA30-6000(MOD)	60.00	3	1	5	33	21	12
KA30-7200(MOD)	72.00	3	1	6	33	21	12
KA30-8400(MOD)	84.00	4	2	7	44	28	16

- NOTES:
- DESCRIPTION: SHELVING KIT, SEE PARTS LIST FOR DESCRIPTION AND QUANTITY OF COMPONENTS SUPPLIED WITH EACH KIT. SHELVING KIT IS SUPPLIED PARTIALLY ASSEMBLED AND REQUIRES SOME ASSEMBLY AT POINT OF INSTALLATION. THE STIFFENERS SHALL BE LOCATED AT EACH END AND IN CENTER OF SHELVING PLATFORM FOR PROPER ALIGNMENT AND STRUCTURAL SUPPORT. CLIPS ARE PROVIDED FOR TEMPORARY USE DURING SHIPMENT AND ASSEMBLY. THE CLIPS MAY BE REMOVED OR RELOCATED TO FACILITATE ASSEMBLY OF STIFFENERS.
  - MATERIALS:
    - SHELVING PLATFORM: ALUMINUM ALLOY EXTRUSION 6.102 +.030 -.054 WIDE, (5) EACH.
    - CUSHION: COMMERCIAL QUALITY, CLOSED CELL POLYVINYL CHLORIDE FOAM. UNCOMPRESSED THICKNESS APPROXIMATELY .38 INCH. CUSHION BONDED TO SHELVING PLATFORM WITH PERMANENT ACRYLIC PRESSURE SENSITIVE ADHESIVE.
    - BRACKET, BRACE, STIFFENER, AND CLIP: ALUMINUM ALLOY.
    - STRAP ASSEMBLY: SEE DRAWING CT1109.

3. ASSEMBLY PROCEDURE:
- INSERT SCREW HEX HEAD INTO APPROPRIATE GROOVES IN EXTRUSIONS AS SHOWN. REMOVE OR RELOCATE CLIPS AS REQUIRED FOR INSTALLATION OF SCREWS FOR USE WITH STIFFENERS. NOTE THE VARIATION OF SCREW LENGTHS. INSERT ALL SCREWS BEFORE PROCEEDING.
  - STIFFENER(S) SHALL BE LOCATED AT EACH END AND EQUALLY SPACED ALONG SHELVING, OR IN LINE WITH NEXT ASSEMBLY SUPPORTING STRUCTURE. INSTALL BRACKET(S) AND BRACE(S) AT THE SAME LOCATION AND AT SAME TIME AS STIFFENERS.
  - INSTALL MS21042-4 NUTS, ONTO SCREWS AND TIGHTEN WITH 30 TO 50 INCH POUNDS OF TORQUE.
  - ATTACH STRAP ASSEMBLY TO SHELVING BY INSERTING QUARTER TURN END FITTINGS INTO GROOVES ON PADDED SURFACE. ROTATE END FITTINGS ONE-QUARTER TURN CLOCKWISE TO LOCK IN PLACE. STRAP ASSEMBLY MAY BE SEPARATED BY REMOVING QUICK DISCONNECT HOOK FROM WIRE END OF FASTENER. DO NOT UNLACE WEBBING FROM FASTENER. FASTENER MAY BE CENTERED ALONG STRAP BY SLIDING WEBBING THROUGH THREADING PLATE.
  - SHELVING MAY BE SUPPLIED IN LENGTHS OTHER THAN THAT SHOWN IN TABLE ABOVE.

SPECIFICATION CONTROL DRAWING

INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME Y14.5M-1982 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .XXX ±.015 .XXXX ±.010 ANGLES ±.5° TOLERANCES:		CONTRACT NO. _____ DATE 9-5-97 DRAWN BY L. HARTSIG CHECKED BY P. LANE 2-7-05 APPROVED BY P. LANE 2-7-05 MANUFACTURING _____ CUSTOMER _____		<b>AGM CONTAINER CONTROLS, INC.</b> P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020 <b>SHELVING</b>	
DO NOT SCALE DRAWING PREPARED BY _____ CHECKED BY _____ APPROVED BY _____		SCALE 1/2 RELEASE DATE _____		SIZE FSCM NO. _____ DWG. NO. <b>KA30(MOD)</b> REV <b>E</b> D 08992 SHEET 1 OF 1	