

8 7 6 5 4 3 2 1


REVISIONS				
ZONE	LTR.	DESCRIPTION	DATE	APPROVED

APPROVED
By Eric Zuercher at 12:14 pm, Feb 08, 2024

NOTES UNLESS OTHERWISE SPECIFIED:

1. ROTATE COVER ASSEMBLY APPROXIMATELY 90° COUNTER CLOCKWISE TO EXPOSE DESICCANT PORT OPENING.
2. $\phi 4.015$ HOLE REQUIRED FOR MOUNTING. MOUNTING SURFACE MUST BE FLAT AND FREE OF IRREGULARITIES.
3. MATERIALS AND FINISHES:
 - 3.1 COVER ASSEMBLY AND BRACKET: STAINLESS STEEL TYPE 302/304, PASSIVATED IAW SAE AMS2700.
 - 3.2 COVER SPRING CLIPS: (NOT SHOWN) CRES AISI 17-7PH, PASSIVATED IAW SAE AMS2700.
 - 3.3 HOUSING, SPANNER NUT, AND WASHER: ALUMINUM ALLOYS.
 - 3.4 (DELETED).
 - 3.5 FINISH: ALUMINUM ALLOYS CONVERSION COATED IAW MIL-DTL-5541, TYPE 1, CLASS 1A. THREADS OF SPANNER NUT ADDITIONALLY COATED WITH DRY FILM LUBRICANT.
 - 3.6 RETAINED GASKET AND INTERNAL SEAL: IAW MIL-P-25732, OR COMMERCIAL GRADE EPDM.
 - 3.7 CABLE: WOVEN STAINLESS STEEL.
4. PART MARK LOCATION.
5. THIS ITEM IS NOT REPAIRABLE EXCEPT BY AGM CONTAINER CONTROLS, INC.
6. THE FOLLOWING ITEMS, WHICH ARE FURNISHED AS PART OF THIS ASSEMBLY, MAY BE PURCHASED SEPARATELY AS SPARES:

385008-44	SPANNER NUT
385010-6	WASHER
MS28775-339	INTERNAL SEAL
MS28775-242	RETAINED GASKET
TA495-RC-*	REPLACEMENT COVER
* USE APPLICABLE DASH No.	
7. RECOMMENDED SPANNER NUT INSTALLATION TORQUE: 150 IN-LBS.

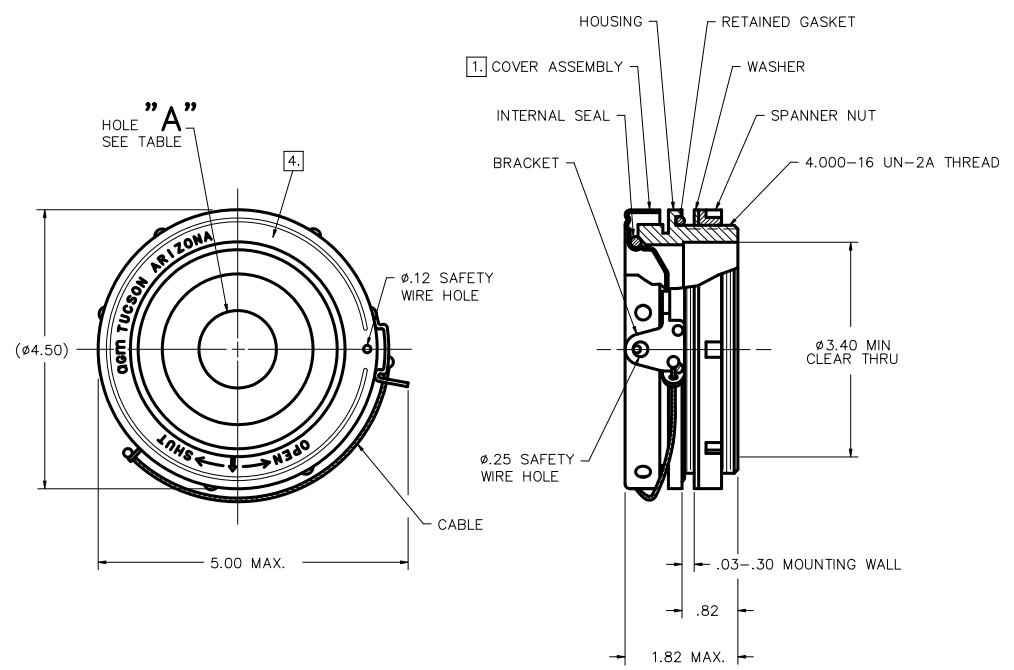

PART NO.	HOLE "A" DIA.
TA495	NONE
TA495-3	1.050
TA495-4	1.265
TA495-5	2.015

INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS .005 .010 .020 .030 .050 .100 .150 .200 .300 .500 .750 1.000 ANGLES $\pm .5^\circ$		CONTRACT NO. DATE L.HARTSIG 1-21-88 CHECK K.BRADY 1-22-88 APPROVED B.CROWLEY 1-25-88 MANUFACTURING		AGM CONTAINER CONTROLS, INC. P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020	
DO NOT SCALE DRAWING PART DASH NO.		TITLE DESICCANT PORT		SIZE: FSCM NO. DWG. NO. REV D 08992 TA495 J	
NEXT FINAL QTY. REQD PER ASSY.	NEXT ASSY. USED ON APPLICATION	SCALE: 1/1	RELEASE DATE	SHEET 1 OF 1	FILE TA495