

4

3

2

1

D

D

C

C



B

B

A

A

1. NOTES:
- SPECIFICATIONS:
- 1.1 THIS OBSERVATION WINDOW MEETS THE REQUIREMENTS OF SAE AS26860, TYPE II, AS APPLICABLE. FOR MOUNTING THRU A 1.05 DIA. HOLE.
- 1.2 THIS UNIT IS DESIGNED FOR MOUNTING IN A RIGID CONTAINER, WITH A .23 INCH MAXIMUM WALL THICKNESS.
2. MATERIALS AND FINISH:
- 2.1 HOUSING, HEX NUT, WASHER, AND LOCKSCREW (NOT SHOWN): BRASS IAW ASTM B16.
- 2.2 FINISH, BRASS COMPONENTS EXCEPT LOCKSCREW (NOT SHOWN): ZINC PLATED PER ASTM B633, ROHS-COMPLIANT.
- 2.3 GASKETS; PER MIL-PRF-6855, CL. 2, GR.60.
- 2.4 WINDOW; PLEXIGLAS PER MIL-P-5425.

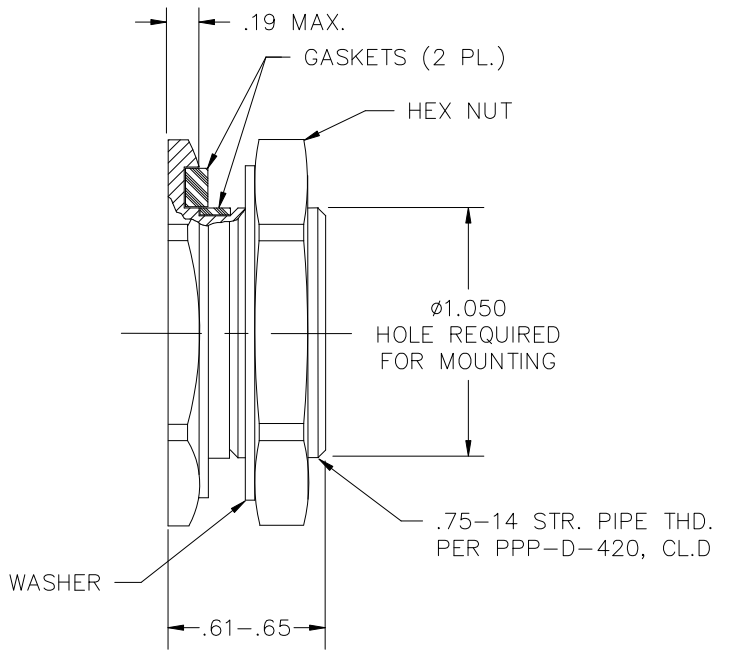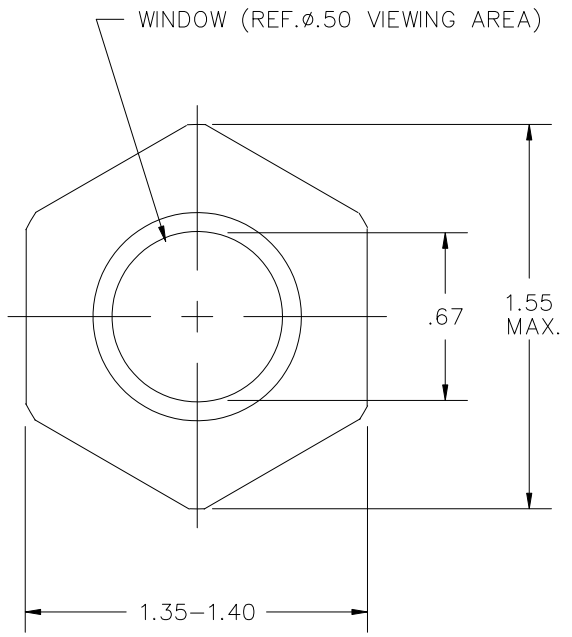

REVISIONS				
ZONE	LTR.	DESCRIPTION	DATE	APPROVAL

APPROVED
By Jordan Bontrager at 8:27 am, Sep 03, 2026

					INTERPRET DIMENSIONS AND TOLERANCES IAW ASME Y14.5M-1994		CONTRACT NO.		AGM CONTAINER CONTROLS, INC.																									
					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN M.ONTIVEROS		DATE 4-21-05		P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020																							
					DECIMALS .XX ±.015 .XXX ±.010		CHECK P. LANE		4-21-05		TITLE																							
					ANGLES ±.5°		APPROVED P. LANE		4-21-05		OBSERVATION WINDOW																							
					DO NOT SCALE DRAWING		MANUFACTURING				SIZE B		FSCM NO. 08992		DWG. NO. TA450		REV. D																	
					FINISH		CUSTOMER				SCALE NONE		RELEASE DATE		SHEET 1 OF 1																			
PART DASH NO.					QTY. REQ'D PER ASSY.					APPLICATION					SIMILAR TO					ACT. WT.					CALC. WT.									

4

3

2

1