

4

3

2

1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND EXCEPT WITH WRITTEN PERMISSION BY AGM CONTAINER CONTROLS, INC. SUCH INFORMATION SHALL NOT BE PUBLISHED, DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE AND THE DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.

REVISIONS				
ZONE	LTR.	DESCRIPTION	DATE	APPROVED
APPROVED By Declan Loomis at 11:43 am, Sep 14, 2026				

NOTES UNLESS OTHERWISE SPECIFIED:

1. MATERIAL:

1.1 HOUSING: ALUMINUM ALLOY.

1.2 SCREEN: TYPE 304 CRES WIRE CLOTH, 100 X 100 MESH, PLAIN WEAVE.

1.3 CONDUCTIVE ADHESIVE: SILVER FILLED EPOXY, TECKNIT PART NUMBER 72-08116 OR EQUIVALENT, VOLUME RESISTIVITY .005 OHM-CM.


1.4 CONDUCTIVE O-RING: SILVER-PLATED, ALUMINUM-FILLED SILICONE ELASTOMER IAW MIL-DTL-83528, TYPE B.

2. FINISHES:


2.1 HOUSING: ANODIZED IAW MIL-PRF-8625 TYPE II, CLASS 1, EXCEPT SURFACE IN CONTACT WITH CONDUCTIVE O-RING SHALL BE CONVERSION COATED IAW MIL-DTL-5541 TYPE II, CLASS 3 AND SURFACE IN CONTACT WITH SCREEN SHALL BE BARE.

2.2 SCREEN: PASSIVATED.

3. IDENTIFY IAW MIL-STD-130 WITH MANUFACTURER'S PART NUMBER BY BAG AND TAG.

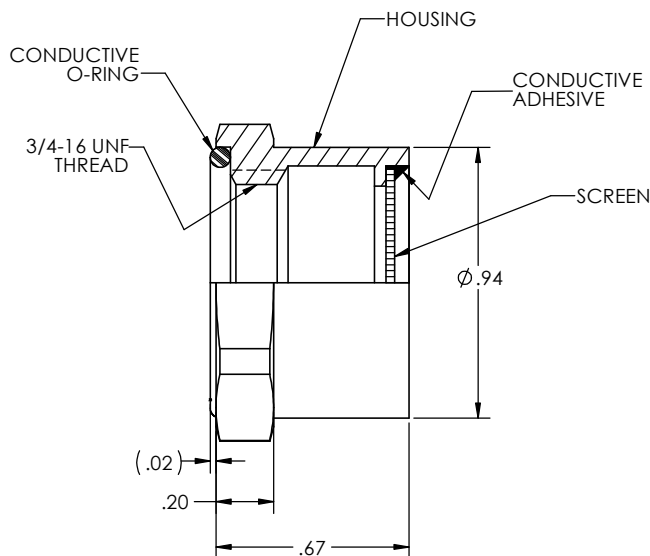

SECTION A-A

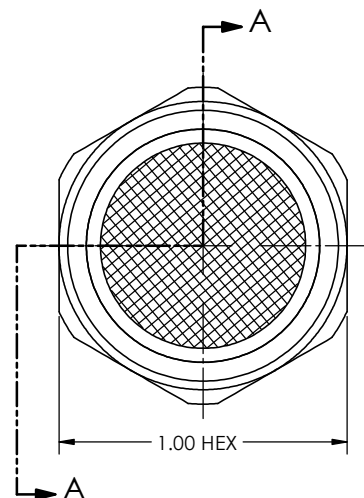

					INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M-1994		CONTRACT		AGM CONTAINER CONTROLS, INC. P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020			
					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN		TITLE			
					TOLERANCES:		CHECK		RFI/EMI SHIELD ASSY			
					DECIMALS		DATE					
					XX ± .015		5-19-05					
					XXX ± .010		5-19-05					
					ANGLES		APPROVED					
					± .5°		5-19-05					
					DO NOT SCALE DRAWING		MANUFACTURING					
					FINISH		CUSTOMER					
					2.							
					SIMILAR TO							
					NCT. WT.							
					CALC. WT.							
PART DASH NO.	NEXT QTY. REQ'D PER ASSY.	FINAL	NEXT ASSY.	USED ON	APPLICATION		SCALE		FSCM NO.		DWG. NO.	
							3/1		08992		292126	
							RELEASE DATE				REV	
											C	
											1 OF 1	

4

3

2

1