


8 7 6 5 4 3 2 1

REVISIONS			DATE	APPROVED
ZONE	LTR.	DESCRIPTION		
				APPROVED By Eric Zuercher at 9:59 am, Feb 16, 2026

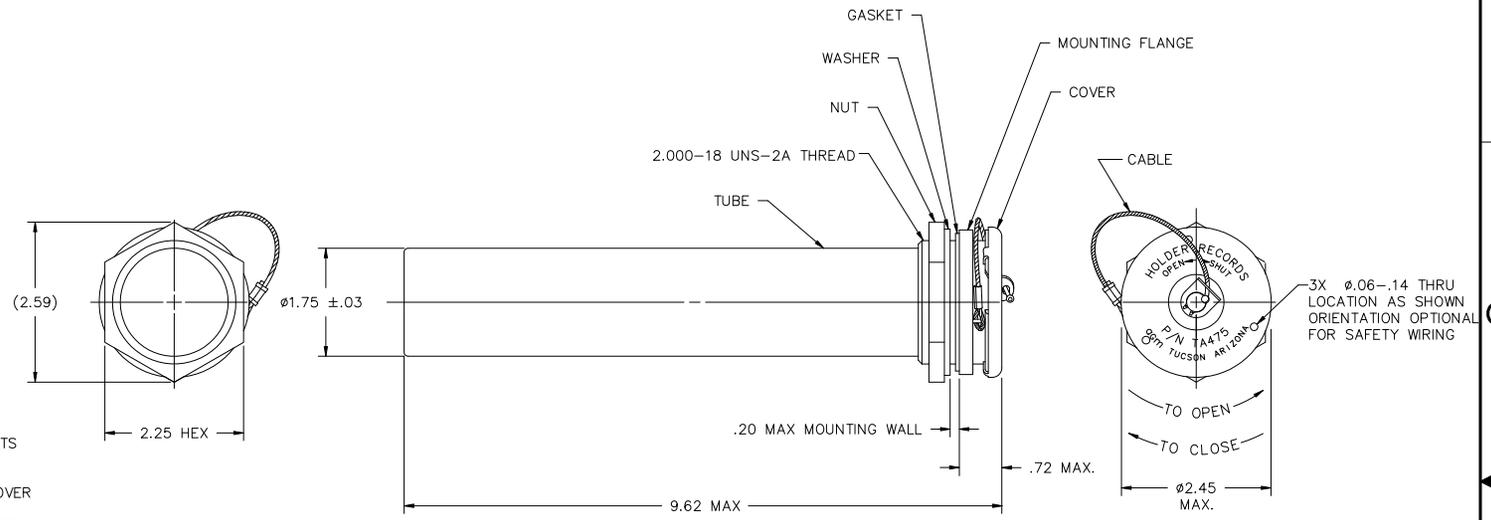

NOTES UNLESS OTHERWISE SPECIFIED:

1. SPECIFICATIONS:
 - 1.1 RECORDS HOLDER TUBE ACCOMODATES ROLLED DOCUMENTS OR SMALL TOOLS WITHIN $\phi 1.70$ X 9.0 DEEP CHAMBER.
 - 1.2 FOR ACCESS TO RECORDS HOLDER CHAMBER: ROTATE COVER COUNTER CLOCKWISE APPROXIMATELY 30° AND REMOVE. TO INSTALL COVER: ALIGN TANGS ON COVER WITH NOTCHES IN FLANGE. PRESS COVER ONTO FLANGE AND ROTATE CLOCKWISE TO STOP.
2. MATERIAL:
 - 2.1 MOUNTING FLANGE, TUBE, NUT AND WASHER: ALUMINUM ALLOYS
 - 2.2 COVER: STAINLESS STEEL.
 - 2.3 CABLE: STAINLESS STEEL
 - 2.4 GASKET: SILICONE RUBBER IAW A-A-59588, CLASS 2A OR 2B, GRADE 60.
3. FINISH:
 - 3.1 ALUMINUM ALLOYS: CONVERSION COATED IAW MIL-C-5541, CLASS 1A.
 - 3.2 NUT ADDITIONALLY COATED WITH DRY FILM LUBRICANT.
 - 3.3 COVER: PASSIVATED IAW SAE AMS 2700.
4. THIS ITEM IS NOT REPAIRABLE EXCEPT BY AGM CONTAINER CONTROLS, INC.
5. THE FOLLOWING ITEMS, WHICH ARE FURNISHED AS PART OF THIS ASSEMBLY, MAY BE PURCHASED SEPARATELY AS SPARES:

TA475-RC-15	REPLACEMENT COVER
770014-44	NUT
500016-6	WASHER
500080	GASKET

INTERPRET DIMENSIONS AND TOLERANCES IAW ASH 114.9M-1982 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS .001 ±.005 .005 ±.010 .010 ±.015 .015 ±.020 ANGLES ±.5°		CONTRACT NO. _____ DATE 10-4-88 DESIGNER L.HARTSIG CHECKER K.BRADY APPROVED B.CROWLEY MANUFACTURING _____		AGM CONTAINER CONTROLS, INC. P.O. BOX 40020 - TUCSON, ARIZONA 85717-0220 RECORDS HOLDER	
DO NOT SCALE DRAWING FINISH 3.		SCALE 1/1 RELEASE DATE _____		SIZE D FSCM NO. 08992 DWG. NO. TA475 REV G	
PART QTY. REQD. PER ASSY. NO. _____		NEXT FINAL NEXT ASSY. USED ON APPLICATION _____		SHEET 1 OF 1	

A

A