

4

3



2

1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND EXCEPT WITH WRITTEN PERMISSION BY AGM CONTAINER CONTROLS, INC. SUCH INFORMATION SHALL NOT BE PUBLISHED, DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE AND THE DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.

REVISIONS			
ZONE	LTR.	DESCRIPTION	DATE

APPROVED
By Declan Loomis at 3:36 pm, Sep 15, 2026

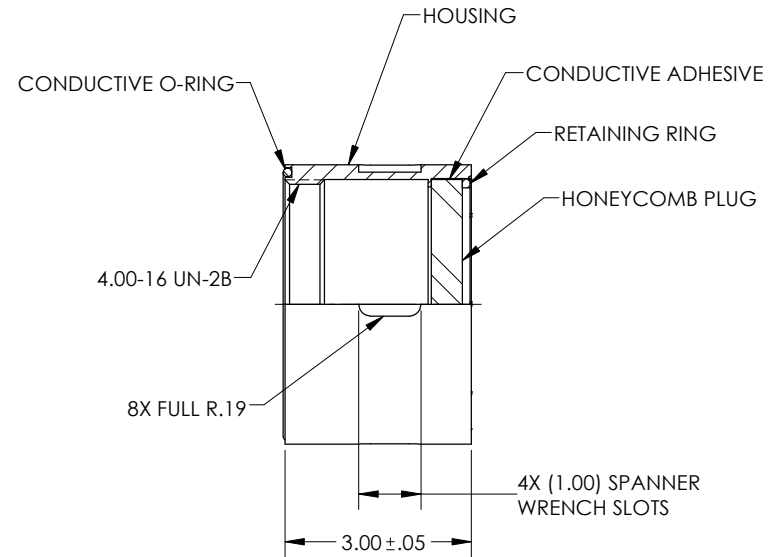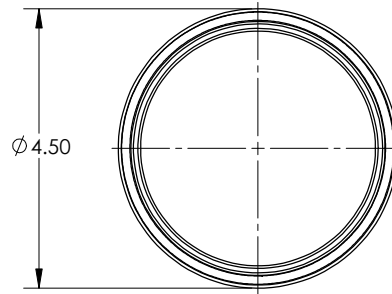

NOTES UNLESS OTHERWISE SPECIFIED:

- MATERIALS:
 - HOUSING, HONEYCOMB PLUG, AND RETAINING RING: ALUMINUM ALLOY
 - CONDUCTIVE ADHESIVE: SILVER FILLED EPOXY, TECKNIT PART NUMBER 72-08116 OR EQUIVALENT, VOLUME RESISTIVITY .005 OHM-CM.
 - CONDUCTIVE O-RING: SILVER-PLATED, ALUMINUM-FILLED FLUOROSILICONE ELASTOMER.
- FINISH: ALUMINUM COMPONENTS CONVERSION COATED IAW MIL-DTL-5541, TYPE II, CLASS 3, RoHS COMPLIANT.
- IDENTIFY IAW MIL-STD-130 WITH MANUFACTURER'S PART NUMBER BY BAG AND TAG.

					INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M-1994		CONTRACT NO.		aGm CONTAINER CONTROLS, INC.			
					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN		P.O. BOX 40020 - TUCSON, ARIZONA 85717-0020			
					TOLERANCES:		M.ONTIVEROS		TITLE			
					DECIMALS		DATE		RFI/EMI NUT			
					XX ± .015		6-19-15					
					XXX ± .010		CHECK					
					ANGLES		P.LANE					
					± .5°		6-24-15					
					DO NOT SCALE DRAWING		APPROVED					
					FINISH		P.LANE					
							6-24-15					
							MANUFACTURING					
							CUSTOMER					